•		111-2	0-	1
1	- F . 3	10-3	0^{-}	$\overline{}$
cian (+) incide this have	1 1 + 1	(-	ъ	

Approved for use through 10/31/2002. OMB 0651-0032

Patent and Trademark Office. U.S. DEPARTMENT OF COMMERCE

UTILITY PATENT APPLICATION **TRANSMITTAL**

Sprint IDF 1398 (4000-00700) Attorney Docket No.: First Inventor or Application Identifier Brandon Camp, et al.

Title Express Mail Label No.

Computer Software Method for Administering Batch EL680310742US

Only for new nonprovisional applications under 37 CFR 1 53(b)

	APPLICATION E	LEMENTS	Δ1	DDBESS	O: Aggi	oto = t C	<u> </u>	. C D /	#S
	0 concerning utility pate		ADDRESS TO: Assistant Commissioner for Patents Box Patent Application						
		Washington, DC 20231							
 Fee Transn 	nittal Form (e.g. PTO/SI	B17)		5.			uter Program		
(Submit an	original, and a duplica	te for fee processing)		6.			Amino Acid		Submission
2. Specification	on Total Bases				(if applica	able, all	necessary)	•	
	on Total Pages. arrangement set forth be						Readable Cop		
- Descriptiv	ve title of the invention	•			b. 📙 Pa	per Copy	(identical to	computer co	ору)
- Cross Ref	ferences to Related Appl	lications			c. Sta	itement v	verifying ider	ntity of above	e copies
- Statement	Regarding Fed sponsor	red R & D			<u>COMPA</u>	NYIN	G APPLIC	CATION	<u>PARTS</u>
- Reference	to Microfiche Appendi nd of the Invention	x		7 🗵			s (cover shee		
- Backgrou	mary of the Invention			8.	37 CFR 3	.73(b) St	tatement [] Power of	Attorney
- Brief Des	cription of the Drawings	s (if filed)			(when the				
- Detailed I	Description	. (9.	English T	ranslatio	n Document	(if applicabl	e)
- Claims(s)				10.			osure Stateme	ent (IDS)/PT	O-1449
<u> </u>	of the Disclosure	4		1 _			OS Citations		
3. Drawing(s)	(35 USC 113) T	otal Sheets.		11. 📙	Prelimina				
				12. 🛛	Return Re	ceipt Po	stcard (MPE)	P 503)	
4. Oath or Dec	claration T.	otal Pages 2		1,2 🗖			cally itemized	<i>()</i>	
	•	-		13. 🔲 S	Small Entity		. ,		
	Newly executed (origina	1.27			State	ment file	d in prior app	plication.	
b. Copy from a prior application (37 CFR 1 63(d)) (for continuation/divisional with Box 17 completed) Status still proper and desired 14. Certified Copy of Priority Document(s)									
(for continuation/divisional with Box 17 completed)				(if foreign priority is claimed)					
i DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s)			15						
named in the prior application, see 37 CFR									
1.63(d)(2) and 1.33(b).									
16 If a CONTINUIN	G APPLICATION, ch	eck appropriate box and supply the r	equisi						
Continuation	Divisional	Continuation-in-part (CIP)		of prior apple	cation No.	/_			
Prior application information	mation: Examiner: *	Group/Art	Unit:	*		_			
For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under box 4 considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relief upon when a portion has been involved.				der box 4b, is					
only be relief upon whe	en a portion has been ina	dvertently omitted from the submitte	ed app	lication parts.	reby meorp	orated b	y reference.	i ne incorpoi	ration can
		17. CORRESPONDE							-
		Z// COMMEDI ONDE	TICE.	ADDICESS			<u>-</u>		
Customer Number	er or Bar Code Label (Insert Customer No. or Attach bar co	ode lai	bel here) 213	396 or	Cor	respondence	address helo	w
NAME									
INAINE	Steven J. Funk								
ADDRESS	Sprint Law Departs	ment							
	Sprint Baw Beparts	ment .				· · · · · ·			· · · · · · · · · · · · · · · · · · ·
· · · · · · · · · · · · · · · · · · ·	8140 Ward Parkwa	у							
CITY	Kansas City	STATE) C 1					
	Transas enty	STATE	-+	Missouri	_	ZIP CO	DDE	64114	
COUNTRY	USA	TELEPHONE]	913-624-682	8	FAX		913-624-63	322
Name (Print Type)	Deduce D.C. "							, - 12 02 1 0	
ivaine (Frint Type)	Rodney B. Carroll		Regi	stration No. (Attorney/A	gent)	39,624		
Signature	Signature Date: October 27, 2000								
	1		240		-7, 2000				

PTO/SB/17 (12-98)
Approved for use through 10/31/2002. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

10/2	JC954 (
7/00	S. PT

ı	
	Ø
ı	•
ı	
I	ש
ı	Ⅎ

FEE TRANSMITTAL FY 2000

Patent fees are subject to annual revision.

(\$) 750.00

TOTAL AMOUNT OF PAYMENT

Complete if Known		
Application Number	*	
Filing Date		
First Named Inventor	Brandon Camp, et al.	
Group Art Unit	*	
Examiner Name	*	
Attorney Docket Number	Sprint IDF 1398 (4000-00700)	

METHOD OF PAYMENT (check one) FEE CALCULATION (continued)						
1. The Commissioner is hereby authorized to charge		DITION	AL FEES			
indicated fees and credit any over payments to: Deposit Account No.: 21-0765	Large Fee	Entity Fee	Small Fee	Entity Fee	Fee Description	Fee Paid
Deposit Account Name: Sprint	Code	(\$)	Code	(\$)	ree bescription	ree I alu
Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17	105 127	130 50	205 227	65 25	Surcharge - late filing fee or of Surcharge - late provisional fifee or cover sheet	
2. Payment Enclosed:	139	130	139	130	Non-English specification	\$
☐ Check ☐ Money Order ☐ Other	147	2,520	147	2,520	For filing a request for reexam	
	112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
FEE CALCULATION	113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	. \$
1 BASIC FILING FEE	115	110	215	55	Extension for reply within 1st	month \$
	116	390	216	195	Extension for reply within 2nd	
Large Entity Small Entity	117	890	217	445	Extension to reply within 3rd	month \$
Fee Fee Fee Fee Description Fee Paid	118	1,390	218	695	Extension to reply within 4th i	nonth \$
Code (\$) Code (\$)	128	1,890	228	945	Extension to reply within 5th	nonth \$
σο σο (Φ) σο σο (Φ)	119	310	219	155	Notice of Appeal	\$
101 710 201 355 Utility filing fee \$	120	310	220	155	Filing a brief in support of an	appea! \$
The state of the s	121	270	221	135	Request for oral hearing	\$
106 320 206 160 Design filing fee \$	138	1,510	138	1,510	Petition to institute a public us	e \$
107 490 207 245 Plant filing fee \$					proceeding	
108 710 208 355 Reissue filing fee \$	140	110	240	55	Petition to revive - unavoidable	le \$
114 150 214 75 Provisional filing fee \$	141	1,240	24 I	620	Petition to revive - unintention	nal \$
	142	1,210	242	605	Utility issue fee (or reissue)	\$
SUBTOTAL (1) \$ 710.00	143	440	243	220	Design issue fee	\$
300101AL (1) 3 /10.00	144	600	244	300	Plant issue fee	\$
2. EXTRA CLAIM FEES	122	130	122	130	Petitions to the Commissioner	\$
	123	50	123	50	Petitions related to provisional	
Fee from	126	240	126	240	Submission of Information Dis	
Extra below Fee Paid	581	40	581	40	Recording each patent assignment	ent \$40.00
Total Claims $* - 20 = * x 18.00 = $$	Ì				per property (times number of	
Independent Claims * $3 = x \times 80.00 = $ \$	146	690	246	245	properties)	
Multiple Dependent 270.00 = \$	140	090	246	345	Filing a submission after final	\$
Large Entity Small Entity	149	690	249	345	rejection (37 CFR 1.129(a)) For each additional invention to	o be \$
Fee Fee Fee Fee Description		(10)			examined (37 CFR 1.129(b))	
Code (\$) Code (\$)					73.	\$
103 18 203 9 Claims in excess of 20	Other fee	(specify)				\$
102 78 202 39 Independent claims in excess of 3						
104 260 204 130 Multiple dependent claim						
109 78 209 39 Reissue independent claims						
Tressour macpendent training	*Reduced	l by Basic	Filing Fee	Paid SUB	STOTAL (3)	\$40.00
over original patent 110 18 210 9 Reissue claims in excess of 20						
and over original patent						
SUB TOTAL (2) \$ 0						
SUBMITTED BY Complete (if applicable)					cable)	
Typed or Printed Name Rodney B. Carroll				Regi	stration Number 3	9,624
Signature Date October 27, 2000 Deposit Account User ID				sit Account User ID		

10

15

20

TITLE

Computer Software Method for Administering Batch Jobs

BACKGROUND OF THE INVENTION

The present invention is a computer software method for administering batch jobs, and more specifically scheduling, initializing, dispatching, and executing batch jobs. Preferably, the batch jobs are written as Java applications, and the batch jobs may be located on a local computer or distributed across an enterprise-wide computing system.

A batch job (also referred to as a batch program) is a computer software application (i.e., program) for performing some repetitive, low priority task that typically requires no direct external input (i.e., non-interactive, non-conversational). Common examples of batch jobs include report generation (e.g., daily, weekly, monthly reports) and data updating, backup, and sorting. Batch job administration is the scheduling, execution, etc. of batch jobs on a computer or network with minimal user supervision.

Batch jobs may be written in a variety of computer languages such as Cobol, Natural, SQL, C, C+, C++, etc. The choice of the language used to implement the batch job is heavily influenced by the resources and information required by the job during execution. For example, a batch job producing reports to show activity and modifications of customer information in a database likely would be implemented in SQL. Thus, batch jobs are often tightly coupled to the components and services that process them, thereby making it difficult to reuse the batch job in a different domain (i.e., platform) without substantial modification and rewriting. The present invention addresses this need for code reuse and platform independence by encapsulating batch

20

5

10

jobs and providing a uniform application programming interface (API) for components and services processing the jobs.

SUMMARY OF THE INVENTION

The present invention discloses a method for processing batch jobs, comprising wrapping the batch job to create an application programming interface for communication with a batch framework, the batch framework comprising a batch dispatcher class, and the batch dispatcher class further comprising a method to execute the batch job; and invoking the batch framework according to a predetermined schedule. The batch job may reside locally with the batch framework remotely from the batch framework. In a preferred embodiment, the batch framework is invoked by a scheduling service, preferably the AutoSys scheduling service on Unix platform. The AutoSys scheduling service further executes a command line parameter, either a Unix shell script or a Windows NT batch file.

DESCRIPTION OF THE DRAWINGS

Figures 1A and 1B are block diagrams of a preferred embodiment of the invention wherein a batch job is executed in a local environment.

Figures 2A and 2B are block diagrams of a preferred embodiment of the invention wherein a batch job is executed in a distributed environment.

Figures 3 is an object model, also referred to as a class diagram, of the batch framework of this invention.

20

5

10

DETAILED DESCRIPTION OF THE INVENTION

Referring to Figs 1A and 2A, scheduler 5 is attached to and invokes batch framework 10, which in turn is connected to and executes batch job 15. Fig. 1A represents a local operating environment, wherein scheduler 5, batch framework 10, and batch job 15 are all operating on a local computer 20. Fig. 2A represents a distributed operating environment, wherein scheduler 5 and batch framework 10 operate on local computer 20 to call and execute batch job 15 operating on remote computer 25. Alternative embodiments not shown include, distributing scheduler 5, batch framework 10, and batch job 15 over three separate computers, and distributing scheduler 5 on a local computer and batch framework 10 and batch job 15 on a remote computer. In either a local or distributed environment, local computer 20 and remote computer 25 each may be any suitable hardware for hosting and executing a computer application, such as a work station, personal computer, or server. Furthermore, any suitable operating system may be used on local computer 20 and remote computer 25, for example Windows, Windows NT, OS/2, UNIX, etc. In the distributed environment of Fig. 2A, local computer 20 can be linked to and communicate with remote computer 25 according to any suitable distributed computing system, for example a local or wide area network communicating via transmission control protocol / internet protocol (TCP/IP).

Batch job 15 may be any application program performing a task that lends itself to batch processing, and batch job 15 may be written in any suitable programming language. Batch job 15 has an application programming interface (API) 17, and batch framework 10 communicates with batch job 10 though API 17. An API is a language and message format used by an application program/component to communicate with another program/component (e.g., an operating system or some other system or control program). Preferably, API 17 is a Java

20

5

10

interface, which is written in the Java programming language available from Sun Microsystems Inc., and operates within a Java virtual machine (JVM).

Preferably, batch framework 10 is a Java framework comprising the classes shown in Fig. 3. Batch job dispatcher class 100 is the main (i.e., public) entry point into batch framework 10, this is batch job dispatcher class 100 is the executable that is invoked in order to use the functionality provided by the framework. As used in object technology, a class defines the methods and variables for a particular type of object; all objects of a given class are identical in form and behavior but contain different data in their variables. Accessors are the methods on a class that provide access to the variables of the class (for example, get and set commands). The methods and variables comprising each class are shown in Fig. 3, and it will be understood that these methods and variables may be modified by one skilled in the art without departing from the scope of the present invention.

EJB batch job dispatcher 105 is a subclass that extends batch job dispatcher class 100. EJB batch job dispatcher 105 extends the functionality of batch job dispatcher class 100 in order to run (i.e., execute) batch jobs located remotely, and specifically remote jobs operating as enterprise java beans (EJBs). While use of EJBs to run remote batch jobs is preferred, other subclasses could be added to cover running remote jobs other than EJBs.

Batch job environment 110 is an interface that defines the functionality of the implementation of a batch job environment object. An interface (also known as a message interface) is a communication surface that determines the signals (e.g., calls) that can pass through the surface; in other words, the interface defines which calls an object will respond to. That is, the interface defines the base functionality (i.e., methods) that is required for an implementation of the interface. Batch job environment implementation class 115 implements

20

5

10

batch job environment 110. The implementation of an object consists of a class definition that implements the object interface. A batch job environment object, comprising an implementation of the batch job environment implementation class 115 upon request by batch job dispatcher class 100, contains configuration information (e.g., batch job name and run parameters) for the batch job. The configuration information is passed to the batch job (either locally or remotely) by batch job dispatcher class 100. A batch job environment object implemented from the batch job environment class is a serializeable object that can be passed to a remote batch job operating as an EJB.

Batch exception class 120 is a standard error message class corresponding to common errors (i.e., throwable exceptions) encountered in implementing the batch framework. In carrying out its functions, the batch framework may call other classes or frameworks to provide particular functionality. In the preferred embodiment of Fig. 3, batch job dispatcher class 100 calls file log class 125 (for a logging framework) to obtain file logging functionality or batch job environment 110 calls application environment class 130 (from an application environment framework) to obtain environment/configuration functionality.

Referring generally to Figs. 1 and 2, batch framework 10 accepts the broad batch job class (i.e., a Java class name), the specific batch job to be executed (i.e., a method name), and the parameters governing execution of the batch job (i.e., method parameters). The method of the class is executed as a batch job with the parameters supplied as arguments and the return code form the batch job method is passed back. Thus, batch framework 10 provides a simple and consistent command line interface for requesting that a batch job be executed.

Fig. 1B is a preferred embodiment of the local operating environment of Fig. 1A, wherein a standalone java batch job is executed by the batch framework in response to a request from a

20

5

10

Unix shell script. Scheduler 10 (Fig. 1A) is an automated system (i.e., AutoSys 30) provided by the operating systems (OS) for the scheduling and management of jobs. AutoSys is the standard scheduling service available on Unix operating platforms. At a scheduled time, AutoSys 30 executes Unix shell script 35 or a Windows NT batch file. Alternatively, scheduler 10 may be incorporated into batch framework 10, for example by coding a scheduling method into batch job dispatcher class 100.

Unix shell script 35 comprises command line arguments, including the batch job name/class (e.g., accounts payable 45) and the specific method (e.g., backup accounts 50) to perform. Thus, Unix shell script 35 invokes main method 102 on batch job dispatcher class 100, passing the command line arguments. The main method, also referred to as a start method, is the entry point into the framework that creates an instance of the class. The main method is a static method rather than a member method, meaning that the main method can be invoked without instantiating the class. Batch job dispatcher class 100 retrieves a batch job environment object from batch job environment class 110, optionally using utility frameworks 40 such as an application environment framework (Fig. 3). The batch job environment is used to register a given instance of the batch job dispatcher with a utility framework such as a logging framework (Fig. 3).

Batch job dispatcher class 100 uses the Java Reflection API to find the requested job class name (e.g., accounts payable 45) within its own Java virtual machine (JVM), that is local or standalone JVM 55. The Java Reflection API is a feature in the Java programming language that allows an executing Java program to examine or "introspect" upon itself, and manipulate internal properties of the program or classes executing within a program. Batch job dispatcher 100 uses the Java Reflection API to locate the appropriate method (e.g., backup accounts 50) for the job

20

5

10

class and invokes the retrieved method passing the application environment and properties as parameters. Batch job 15 accesses utility frameworks 40 as needed to complete processing. Batch job 15 passes return code back to batch job dispatcher class 100, which is passed all the way back to AutoSys 30.

Fig 2B is a preferred embodiment of the distributed operating environment of Fig. 2A, wherein a remotely located enterprise Java bean (EJB) batch job is executed by the batch framework in response to a request from a Unix shell script. Scheduler 10 (Fig. 2A) is an automated system (i.e., AutoSys 30) provided by the operating systems (OS) for the scheduling and management of jobs. At a scheduled time, AutoSys 30 executes Unix shell script 35 or a Windows NT batch file. Alternatively, scheduler 10 may be incorporated into batch framework 10, for example by coding a scheduling method into batch job dispatcher class 100.

Unix shell script 35 comprises command line arguments, including the batch job name/class (e.g., accounts payable EJB 46) and the specific method (e.g., backup accounts EJB 51) to perform. Thus, Unix shell script 35 invokes main method 102 on batch job dispatcher class 100, passing the command line arguments. Batch job dispatcher class 100 retrieves a batch job environment object from batch job environment class 110, optionally using utility frameworks 40 such as an application environment framework (Fig. 3). The batch job environment is used to register a given instance of the batch job dispatcher with a utility framework such as a logging framework (Fig. 3).

Batch job dispatcher class 100 uses the Java Reflection API to find and invoke the EJB batch job dispatcher class 105 within its own Java virtual machine (JVM), that is local or standalone JVM 55. Batch job dispatcher class 105 uses Java Reflection API to locate "run EJB"

20

5

10

job" method 106 and invokes the retrieved method passing the application environment and properties as parameters.

EJB batch job dispatcher class 105 uses the Java Reflection API to find the requested job class name (e.g., accounts payable 46) located on a remote Java virtual machine (JVM), that is Weblogic JVM 55. EJB batch job dispatcher 105 uses the Java Reflection API to locate the appropriate method (e.g., backup accounts EJB 51) for the job class and invokes the retrieved method passing the application environment and properties as parameters. Batch job 15 accesses utility frameworks 41 as needed to complete processing. Batch job 15 passes return code back through EJB batch job dispatcher class 105 and batch job dispatcher class 100 all the way back to AutoSys 30.

The batch framework is configured (i.e., initialized) such that it has the necessary system properties for the JVM, the location of a master initialization (ini) file, and an application name as it appears in the master initialization file. Command-line parameters (e.g., the Unix shell script) preferably include the name of the batch job's Java class and name of the batch job's method. Additional parameters required by the batch job's method are placed in a key-value table and passed as one parameter to the batch job. The batch job's method should know the name of the keys to retrieve from the table.

Examples

While the code examples herein are written in the Java programming language, which is available from Sun Microsystems Inc., it is understood that other suitable programming languages may be used as will be readily apparent to one skilled in the art. Furthermore, it should be understood that the code examples are in skeleton or outline form, and are not necessarily intended to be in complete executable form, provided however that one skilled in the

art could easily tailor executable code based upon these examples. The italicized text following the double backslashes (i.e., "//") is commentary text. Examples 1-3 are drawn to the preferred local environment embodiment of Figs. 1A and 1B, and Examples 4-6 are drawn to the preferred distributed environment embodiment of Figs. 2A and 2B.

5

10

EXAMPLE 1

Assume an accounting application group wants to back up their accounts payable from 1992 to 1996. The AccountsPayable class needs configuration values from its initialization file. "Accounting" is the application name as it appears in the master initialization file, and backupAccounts is the name of the method on the AccountsPayable class. The backupAccounts method expects to receive a Properties data structure holding the key-value pairs for "startRange" and "endRange". The resulting upper-half of the shell script would read (case-sensitive):

User - Application Name found in the master init. file

APP_NAME_INIT="Accounting"

User - Batch Job Class Name

JOB_NAME="com.sprint.arch.batch.example.accounting.AccountsPayable"

User - Batch Job Method Name

METHOD NAME="backupAccounts"

User - Key=Value parameter list (space separated)

PARAM LIST="startRange=1992 endRange=1996"

User - Java Class Path for your Batch Job Class.

BATCH_JOB_CLASS_PATH="/home/bcamp/BJD/lib/app/accounting.jar"

A sample master initialization file for Example 1 is:

15

20

5

A sample application initialization file for Example 1 is:

; for NT, MUST use double '\' to delimit directory names i.e. '\\'

; Batch Framework will be looking for 'logging.defaultLogFile=<your default Log File>'

logging.defaultLogFile=d:\\data\\batch\\NT\\defaultLog.doc

; Log file for your application, could be anything (i.e. key ..'refix>.<key>=<your app Log File>'

logging.myLogFile=d:\\data\\batch\\NT\\defaultLog.doc

EXAMPLE 2

The following template applies to batch job class written in Java that will be executed in a standalone JVM from the batch framework. For each type of job to perform, preferably two methods are created. The first method is called by the batch framework, which receives a 'BatchJobEnvironment' object and a Properties table. This first method parses out any parameters from the Properties table, casts the parameters to the appropriate data type (if not a string), and invokes a second batch job method. The first job method should return an integer, and cannot throw any exceptions. Therefore, all anticipated exceptions should be handled at the first or second batch job method. A return code of '0' should be used when processing is successful. All other return codes from the batch job should be '10' or greater. Sample code is as follows:

public static int <Method Name>(BatchJobEnvironment, Properties) {

<Initialize variables needed for the Logging Framework>

<Initialize local variables>

<Parse key-value pairs from the Properties into parameter variables>

<Cast (if necessary) the parameters into the appropriate type>

< Catch any exceptions that could occur with the typecast>

<Log the error with the Logging Framework>

25

10

The secondary method can receive any required parameters should perform the actual job processing. It is free to instantiate other helper classes, call other methods, or to execute all the work solely within the secondary method. The second method must return an integer and cannot throw exceptions. Sample code is as follows:

EXAMPLE 3

The following is an example of a class, "AccountsPayable", which has a job method, "backupAccounts". The class definition contains constants needed for a logging framework and predetermined return codes. An AccountingException class was created to represent all caught application exceptions for the accounting package.

```
Class definition:
                package com.sprint.arch.batch.example.accounting;
     5
                import java.util.Properties:
                import java.util.Date;
                import com.sprint.arch.logging.*;
                import com.sprint.arch.batch.BatchJobEnvironment;
    10
               /**
                * This type was created in VisualAge.
               public interface AccountsPayableReturnCodes {
    15
                  static final int SUCCESSFUL RET C
                                                                     = 0;
                  static final int DEFAULT RET C
                                                             = 10;
                  static final int ATOI ERR RET C
                                                             =20;
                  static final int INVALID PARAM RET C = 21;
               }
   20
* This type was created in VisualAge.
Hand Hand
                */
               package com.sprint.arch.batch.example.accounting;
ų
   25
N,
               import java.util.Properties;
4
               import java.util.Date;
1-2
               import com.sprint.arch.logging.*;
Hall that the state of the
   30
               import com.sprint.arch.batch.BatchJobEnvironment;
               /**
                * This type was created in VisualAge.
               public class AccountsPayable implements AccountsPayableReturnCodes{
   35
               // Return Code constants have been moved to a new interface
               //AccountsPayableReturnCodes which this class implements. This is
               //per code review suggestions
   40
                private static final String USERID = "Accounting";
                private static final String CLASS NAME = "AccountsPayable";
                // Constants for the Logger
                private static final String LOGGING PREFIX = "logging";
```

private static final String MY LOG KEY = "myLogFile":

ij

OĮ.

Ti,

ij

133

The state state of the state of

```
//Logger is created in the backupAccountsInternal method and it
           //is passed to remaining methods
           /**
 5
            * This method was created in VisualAge.
            * @return int
            * @param appCon com.sprint.arch.batch.BatchJobEnvironment
            * @param p java.util.Properties
           public static int backupAccounts(BatchJobEnvironment batchJobEnv, Properties p) {
10
             return backupAccountsInternal( batchJobEnv, p,
                    CLASS NAME, LOGGING PREFIX, MY_LOG_KEY);
           /**
            * This method was created in VisualAge.
15
            parameters as myLogger and className are passed. this is because
             the same method will be called from ejb.AccountsPayableBean class
            * @return int
            * @param appCon com.sprint.arch.batch.BatchJobEnvironment
            * @param p java.util.Properties
20
           public static int backupAccounts(Object param1, Object param2, Object paramN, FileLog
           myLogger, String className) {
            // Do any neccessary work .....
25
            try {
                   // Log something if neccessary
                   myLogger.logMsg(className + ":backupAccounts session:
                           running ......startRange " + param1 +
                                  "EndRange " + param2, LogBase.DEBUG);
                   myLogger.logMsg(className + ":backupAccounts session:
30
                          completed.", LogBase.DEBUG);
                   myLogger.closeLog();
                   // woo hoo!
                   return SUCCESSFUL RET C;
35
            } catch (LogMsgException e) {
                   // Since logging failed, print the stack trace.
                   // Note: deciding whether or not to return a successfully
                   //return code here should be driven
                   // by the requirements and logic of your application
                   // batch job.
40
                   e.printStackTrace();
                   return DEFAULT RET C;
           }
45
           * This method was created in VisualAge.
```

```
* @return int
                                         * @param appCon com.sprint.arch.batch.BatchJobEnvironment
                                         * @param p java.util.Properties
             5
                                      public static int backupAccountsInternal(BatchJobEnvironment
                                                        batchJobEnv, Properties p, String className, String
                                                                              loggingPrefix, String myLogKey ) {
                                          // Needed for my Logger's logMsg
           10
                                          String method name = "backupAccounts";
                                          int retC = DEFAULT RET C;
                                          String myLogFileName = batchJobEnv.getValue(loggingPrefix
                                                            ,myLogKey);
                                          FileLog mylogger = null;
          15
                                          try {
                                                           // Establish my mylogger
                                                           mylogger = new FileLog(LogBase.DEBUG, LogBase.DEBUG,
                                                                             myLogFileName, true);
                                          } catch (java.io.IOException ioe) {
 20
 41
                                                           //Since logging failed, print the stack trace
O1
                                                           ioe.printStackTrace();
 ű
                                          }
 D.
 *.[
         25
                                         try {
n,
                                                           // register this session with my logger
 Ų.
                                                           Date todaysDate = new Date():
ŝ
                                                           mylogger.logMsg(todaysDate.toString(), LogBase,DEBUG);
la.
                                                           mylogger.logMsg("Begining" + className + ":backupAccounts
Service of the servic
                                                                             session .....", LogBase.DEBUG);
                                         } catch (LogMsgException e) {
                                                           //Since logging failed, print the stack trace
                                                           e.printStackTrace();
                                         }
         35
                                         // Fetch the parameters this method cares about.
                                         String startRangeString = p.getProperty("startRange");
                                         String endRangeString = p.getProperty("endRange");
         40
                                         // Cast (if necessary) the parameters into the appropriate type.
                                        try {
                                                          if (startRangeString == null && endRangeString == null) {
                                                                            return retC;
         45
                                                          Integer startRangeInt = Integer.valueOf(startRangeString);
```

30

```
Integer endRangeInt = Integer.valueOf(endRangeString);
             } catch (NumberFormatException e) {
                    // The string could not be converted into an integer.
                    // Log the exception and location with the Logger
 5
                    String message = "Error attempting to convert a String "+
                                   "parameter to an integer.":
                    try {
                           mylogger.logMsg(message, LogBase.WARNING);
                    } catch (LogMsgException e2) {
                           //Since logging failed, print the stack trace
10
                           e2.printStackTrace();
                    return ATOI ERR RET C;
             }
15
            // Calls a method with the same name and the relevant parameters.
             return backupAccounts(startRangeString
                           endRangeString,null,mylogger,className);
           }
           }
20
```

EXAMPLE 4

Assume an accounting application group wants to back up their accounts payable from 1992 to 1996 and that the accounting group chose to implement their AccountsPayable batch job as an Enterprise Java Bean (EJB). The AccountsPayableEJBObj EJB needs to access the initialization framework and "Accounting" is the application name as it appears in the master initialization file. The application name, "Accounting", need only appear in the master initialization file on the platform where the BatchJobDispatcher executes and does not have to be on the platform where the EJB is deployed. (These two platforms are not necessarily the same.) "AccountsPayableEJBObj" is the application name of the EJB, as defined in the application's initialization file by the entries with an 'ejb' prefix. The name of the method on the AccountsPayableEJBObj EJB is backupAccounts. The backupAccounts method expects to receive a Properties data structure holding the key-value pairs for "startRange" and "endRange". The resulting upper-half of the shell script would look like (case-sensitive):

User - Application Name found in the master init. file

APP NAME INIT="Accounting"

User - Batch Job Class Name as found in the with an 'ejb' prefix in the ini file EJB JOB NAME="AccountsPayableEJBObj "

User - EJB Batch Job Method Name 5

EJB METHOD NAME="backupAccounts"

User - Key=Value parameter list (space separated)

PARAM LIST="startRange=1992 endRange=1996"

10 A sample master initialization file for Example 4 is:

> Accounting=d:\\data\\batch\\NT\\AccountingApp.ini

A sample application initialization file for Example 4 is:

ejb.AccountsPayableEJBObj=com.sprint.arch.batch.example.accounting.ejb.AccountsPayableHome

; For every EJB above, you must provide its provider url and it's initial context factory.

EJB deployed on a WebLogic server

;AccountsPayableEJBObj.java.naming.factory.initial=weblogic.jndi.TengahInitialContextFactory

;AccountsPayableEJBObj.java.naming.provider.url=t3://localhost:7001

;EJB deployed on a Websphere server

AccountsPayableEJBObj.java.naming.provider.url=IIOP:///

AccountsPayableEJBObj.java.naming.factory.initial=com.ibm.jndi.CosNaming.CNInitialContextFa ctory

; for NT, MUST use double '\' to delimit directory names i.e. '\\'

; Batch Framework will be looking for 'logging.defaultLogFile=<your default Log File>'

logging.defaultLogFile=h:\\batch job example\\data\\batch\\NT\\defaultLog.txt

; Log file for your application, could be anything (i.e. key ..'refix>.<key>=<your app Log File>' logging.myLogFile=h:\\batch job example\\data\\batch\\NT\\defaultLog.txt

EXAMPLE 5

The following template applies to any batch job class written in Java that will be executed as an Enterprise Java Bean (EJB) in a WebLogic JVM from the batch framework. For

10

15

20

25

each type of job to perform, two methods should be created. The first method is called by the batch framework, which receives a 'BatchJobEnvironment' object and a Properties table. The method is an instance method, not static. The first method parses out any parameters from the Properties table, casts the parameters to the appropriate data type (if not a string), and invokes a second batch job method. The first job method should return an integer, and cannot throw any exceptions. Therefore, all anticipated exceptions should be handled at the first or second batch job method. A return code of '0' should be used when processing is successful. All other return codes from the batch job should be '10' or greater. Sample code is as follows:

```
public int <Method Name>( BatchJobEnvironment, Properties ) {
        <Initialize variables needed for the Logging Framework>
        <Initialize local variables>
        <Parse key-value pairs from the Properties into parameter variables>
        <Cast (if necessary) the parameters into the appropriate type>
        <Catch any exceptions that could occur with the typecast>
            <Log the error with the Logging Framework>
            <Set the appropriate return code and return it>
        <If no errors occurred, called the underlying batch job method passing the parameter variables>
        <Catch the return code and pass it back to the Batch Framework>
}
```

The secondary method receives any required parameters and performs the actual job processing. It is free to instantiate other helper classes, call other methods, or to execute all the work solely within the secondary method. The second method should return an integer and cannot throw exceptions. Sample code is as follows:

EXAMPLE 6

The following is an example of an EJB remote interface, "AccountsPayableEJBObj," which has a bean, "AccountsPayableBean," and a job method, "backupAccounts." The class definition contains constants needed for a logging framework and predetermined return codes. An AccountingException class was created to represent all caught application exceptions for the accounting package.

Class definition:

```
package com.sprint.arch.batch.example.accounting.ejb;

/**

* This is a Session Bean Class

*/

25 import javax.ejb.*;
import java.util.Properties;
import java.util.Date;

//------ Arch packages

import com.sprint.arch.logging.*;
import com.sprint.arch.configuration.*;
import com.sprint.arch.batch.BatchJobEnvironment;
```

IJ.

gt

ű

O1

1

Ų.

į.

1

```
import com.sprint.arch.applicationenvironment.
                    ApplicationEnvironmentManager;
             import com.sprint.arch.batch.example.accounting.*;
 5
             public class AccountsPayableBean implements javax.ejb.SessionBean {
                    private javax.ejb.SessionContext mySessionCtx = null;
10
                    // Return Code constants - not required as it just uses the
                    //sprint.arch.batch.example.accounting.AccountsPayable
                    //class for its business
                    //methods.
                    // Constants for the Logger
                    private static final String USERID = "Accounting";
15
                    private static final String CLASS_NAME =
                                                               "AccountsPayableBean";
                    private static final String LOGGING PREFIX = "logging";
                    private static final String MY LOG KEY = "myLogFile";
20
                    //Logger
                    //protected FileLog logger = null;
             /**
             * This method was created in VisualAge.
             * @return int
25
             * @param batchJobEnv com.sprint.arch.batch.BatchJobEnvironment
             * @param p java.util.Properties
             //this method simply calls the AccountsPayable batch job method
            //- modified as per code review suggestions
30
            public int backupAccounts(BatchJobEnvironment batchJobEnv,
                           Properties p)
             {
                    return com.sprint.arch.batch.example.accounting.
                           AccountsPayable.backupAccountsInternal(batchJobEnv,
35
                           p, CLASS NAME, LOGGING PREFIX, MY LOG KEY);
            }
            /**
            * ejbActivate method comment.
40
            public void ejbActivate() {
            /**
            * ejbCreate method comment.
45
            public void ejbCreate() {
```

```
/**
    * ejbPassivate method comment.
    */

public void ejbPassivate() {
    }
    /**
    * ejbRemove method comment.
    */

public void ejbRemove() {
    }
    /**
    * setSessionContext method comment.
    */

public void setSessionContext(javax.ejb.SessionContext ctx) {
        mySessionCtx = ctx;
    }
}
```

5

10

CLAIMS

What is claimed is:

1. A process for processing a batch job, comprising:

wrapping the batch job to create an application programming interface for communication with a batch framework, the batch framework comprising a batch dispatcher class, and the batch dispatcher class further comprising a method to execute the batch job; and invoking the batch framework according to a predetermined schedule.

- 2. The process of claim 1 wherein the batch job resides locally with the batch framework.
- 3. The process of claim 1 wherein the batch job resides remotely from the batch framework.
- 4. The process of claim 1 wherein the batch framework is invoked by a scheduling service.
- 5. The process of claim 2 wherein the batch framework is invoked by a scheduling service.
 - 6. The process of claim 3 wherein the batch framework is invoked by a scheduling service.
 - 7. The process of claim 4 wherein the scheduling service is AutoSys.
 - 8. The process of claim 7 where the AutoSys further executes a command line parameter.
- 9. The process of claim 8 wherein the command line parameter is a Unix shell script.

- 10. The process of claim 8 wherein the command line parameter is a Windows NT batch file.
- 11. The process of claim 5 wherein the scheduling service is AutoSys.
- 12. The process of claim 11 where the AutoSys further executes a command line parameter.
- 13. The process of claim 12 wherein the command line parameter is a Unix shell script.
- 10 14. The process of claim 12 wherein the command line parameter is a Windows NT batch file.
 - 15. The process of claim 6 wherein the scheduling service is AutoSys.
- 15 16. The process of claim 15 where the AutoSys further executes a command line parameter.
 - 17. The process of claim 16 wherein the command line parameter is a Unix shell script.
- 18. The process of claim 16 wherein the command line parameter is a Windows NT batch 20 file.

10

ABSTRACT

The present invention discloses a method for processing batch jobs. A batch job is wrapped to create an application programming interface for communication with a batch framework. The batch framework comprises a batch dispatcher class, and the batch dispatcher class further comprises a method to execute the batch job. The batch framework is invoked according to a predetermined schedule. The batch job may reside locally with the batch framework remotely from the batch framework. In a preferred embodiment, the batch framework is invoked by a scheduling service, preferably the AutoSys scheduling service on Unix platform. The AutoSys scheduling service further executes a command line parameter, either a Unix shell script or a Windows NT batch file.

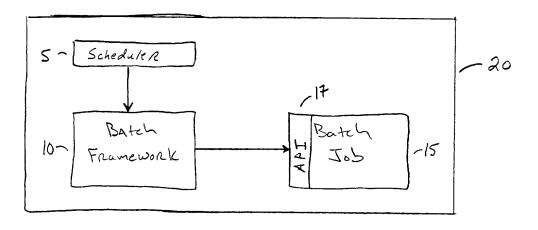


Figure 1A

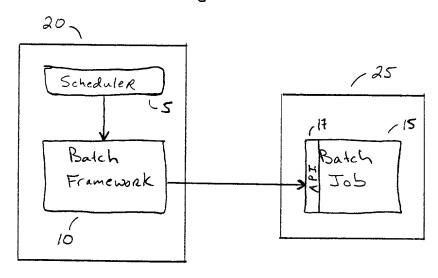


Figure 2A

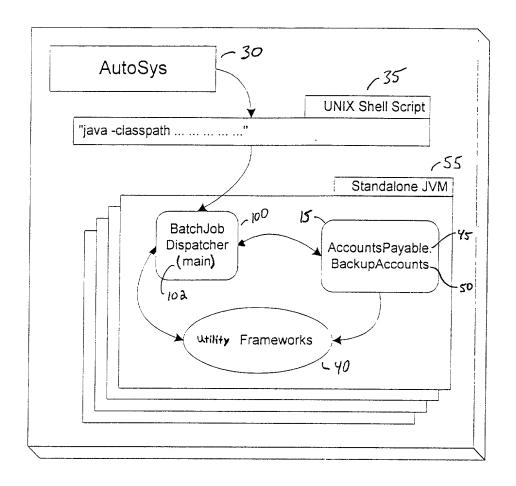


Figure 1 B

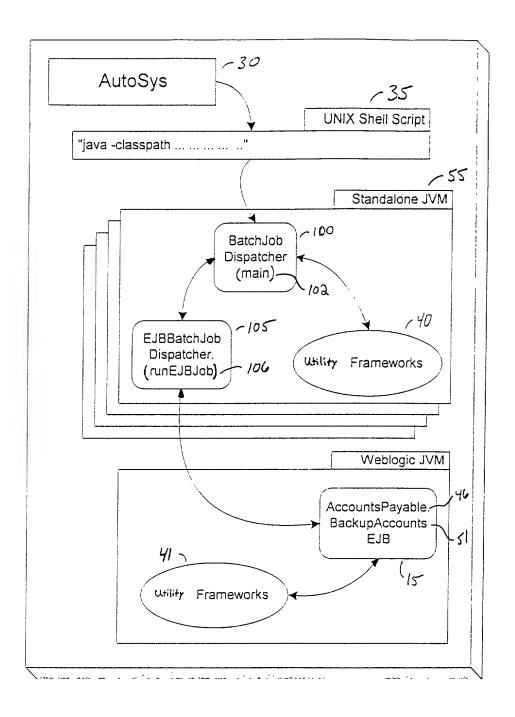


Figure 2 B

~115

BatchJob EnvironmentImpl

_ 130

ApplicationEnvironment

100

BatchJob Dispatcher

Figure 3

DECLARATION AND POWERS OF ATTORNEY

As a below named inventor, I	hereby declar	are that m	y residence,	post office	address and
citizenship is as stated below no	ext to my na	me. I bel	ieve I am the	e original, f	first and sole
inventor (if only one name is listed below) or an original, first and joint inventor (if plural					
names are listed below) of the subject matter which is claimed and for which a patent is sought					
on the invention entitled a "Computer Software and Method for Administering Batch Jobs (IDF					
1398)," the specification of wh	iich was file	d on Octo	ber 27, 2000), as Appli	cation Serial
No not yet assi	igned and wa	as amended	herewith or,	if not ident	tified here by
filing date and serial number, is a	ttached hereto	o. I have re	viewed and u	nderstand th	ne contents of
the above identified specification	, including th	e claims, as	amended by	any amend	ment referred
to above. I acknowledge the dut	y to disclose	information	which is ma	iterial to the	examination
of this application in accordance	with 37 CFR	1.56(a). I	hereby claim	foreign pri	ority benefits
under 35 USC 119 of any foreign	application((s) for pater	nt or inventor'	's certificate	: listed below
and have also identified below ar	ıy foreign apı	plication for	r patent or inv	ventor's cert	ificate by me
or my representatives or assigns for this invention having a filing date before that of the					
application on which priority is cl	aimed:				
Application No.	_ in	on	_priority claimed	d () Yes () No
Application No.	in	on	priority claime	d () Vac () No
Application No.	_ 1111	_ 011	_ priority claime	u () les () NO
Application No.	in	on	priority claimed	d () Yes () No

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 USC 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon. I hereby appoint, individually and collectively, the following as my/our attorney or agent with full power of substitution and revocation, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith:

Harley R. Ball Reg. No. 31,733; and Rodney B. Carroll, Reg. No. 39,624
Steven J. Funk Reg. No. 35,875; and Michael W. Piper, Reg. No. 39,800
Kristin Jordan Harkins, Reg. No. 37,859, and Gene C. Vallow, Reg. No. 40,856
Al C. Metrailer, Reg. No. 27,145

PLEASE ADDRESS ALL COMMUNICATIONS TO:

Steven J. Funk Sprint Law Department 8140 Ward Parkway Kansas City, MO 64114

SOLE OR JOINT	
Inventor (1): Brandon Camp	(Signature in Full)
	(esgamue ma un)
Citizenship: United States	Date:
Post Office Address: 8912 Viking Dr.,	Austin Texas 78758
Residence: same	
SOLE OR JOINT	State
Inventor (2): James G. Mwaura	(Signature in Full)
	(Signature in Full)
Citizenship: Kenya	Date: 10 25 00
Post Office Address: 4153 Polaris #3050, Irving, TX	·
Residence: same	
SOLE OR JOINT	
Inventor ():	
	(Signature in Full)
Citizenship:	Date:
Post Office Address:	
Post Office Address:	
Residence: same	A STATE OF THE STA
COLE OD TODIE	
SOLE OR JOINT Inventor ():	
	(Signature in Full)
Citizenship:	Date:
Post Office Address:	
Residence: same	